



# HBJC922R3328-2N

Rockchip® ARM Cortex A53 RK3328, Android 7.1




1. Rockchip® A53 RK3328 Quad-core 1.5GHz
2. Onboard 1333 /2GB DDR3L DRAM Max. 4GB
3. Onboard 8G Flash ROM Max 32GB
4. Support 1\* Realtek®RTL8211F-CG Gigabit LAN
5. Support 1\* Realtek®GbE external PHY, 1\* RF-LINK RL-SM02F-8822BS 2T2R b/g/n
6. Support Blue ToothV4.1 BLE
7. Support 1\*Micro SD Socket (Max 64G)
8. 4\* USB3.0, 1\* USB2.0, 1\* OTG, 1\* HDMI
9. Support Android 7.1
10. 12V DC-in




## External I/O

### Rear

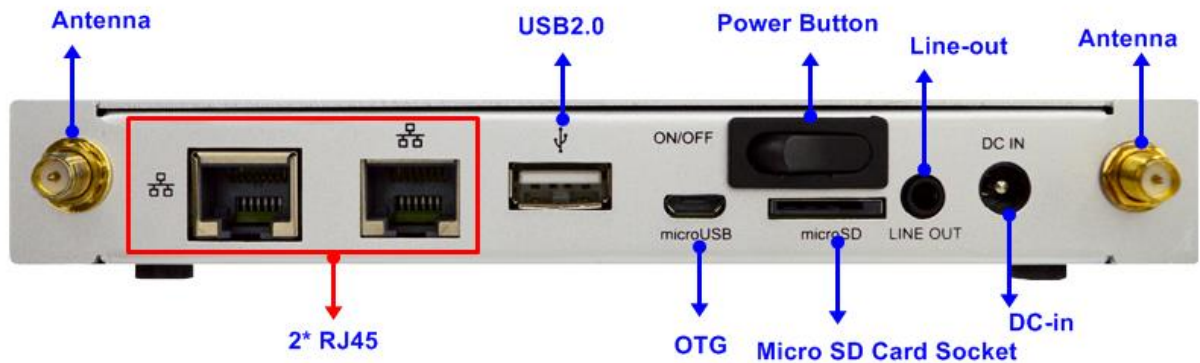

### Front

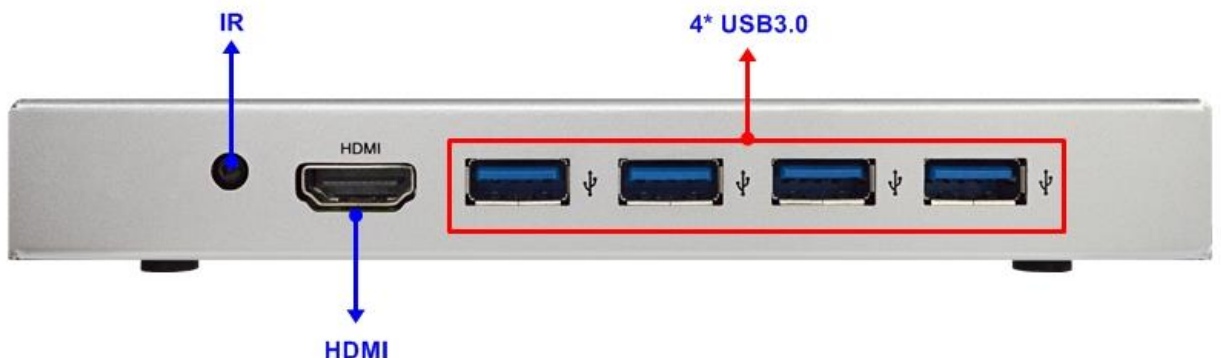


## Specifications

<b>MB Model</b>	JR3328B-2N (uTX SBC)
<b>Part No</b>	● HBJC922R3328-2N
<b>CPU/Chipset</b>	● Rockchip® ARM Cortex A53 RK3328 1.5GHz Quad core ● Rockchip® RK805-1
<b>Memory</b>	2GB/1333MHz DDR3L (Max 4GB)
<b>Storage</b>	● 8GB Flash (Max 32GB)
<b>Network</b>	● 1 * REALTEK RTL8211E-VB Gigabit LAN ● 1 * REALTEK Gigabit LAN external PH ● On board 802.11 a/b/g/n/ac,2.4G ● On board BT-V4.1 BLE
<b>Rear Panel I/O</b>	● 2 * RJ45 ● 1 * Audio Jack ● 1 * USB2.0 ● 1 * OTG ● 1 * Micro SD Socket ● 1 * Power button ● 12V DC-Jack ● 2 * Antenna hole
<b>Front Panel I/O</b>	● 1 * IR ● 1 * HDMI (2.0) ● 4 * USB3.0
<b>Power Source</b>	● DC12V-5.0A ● AC 90~240V input
<b>Compliance</b>	RoHS, ErP Ready
<b>Temperature</b>	Operating Temperature: -10~60°C Storage Temperature: -20 ~ 65 °C
<b>Dimensions</b>	160 (W) x 120.4 (D) x 22 (H) mm
<b>Packing</b>	● Net Weight: KG ● Gross Weight: KG ● Color Box dimension:
<b>OS Support</b>	Android 7.1
<b>Warranty</b>	2 Year limited warranty

\* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

## Mechanical Drawings (Unit = mm)

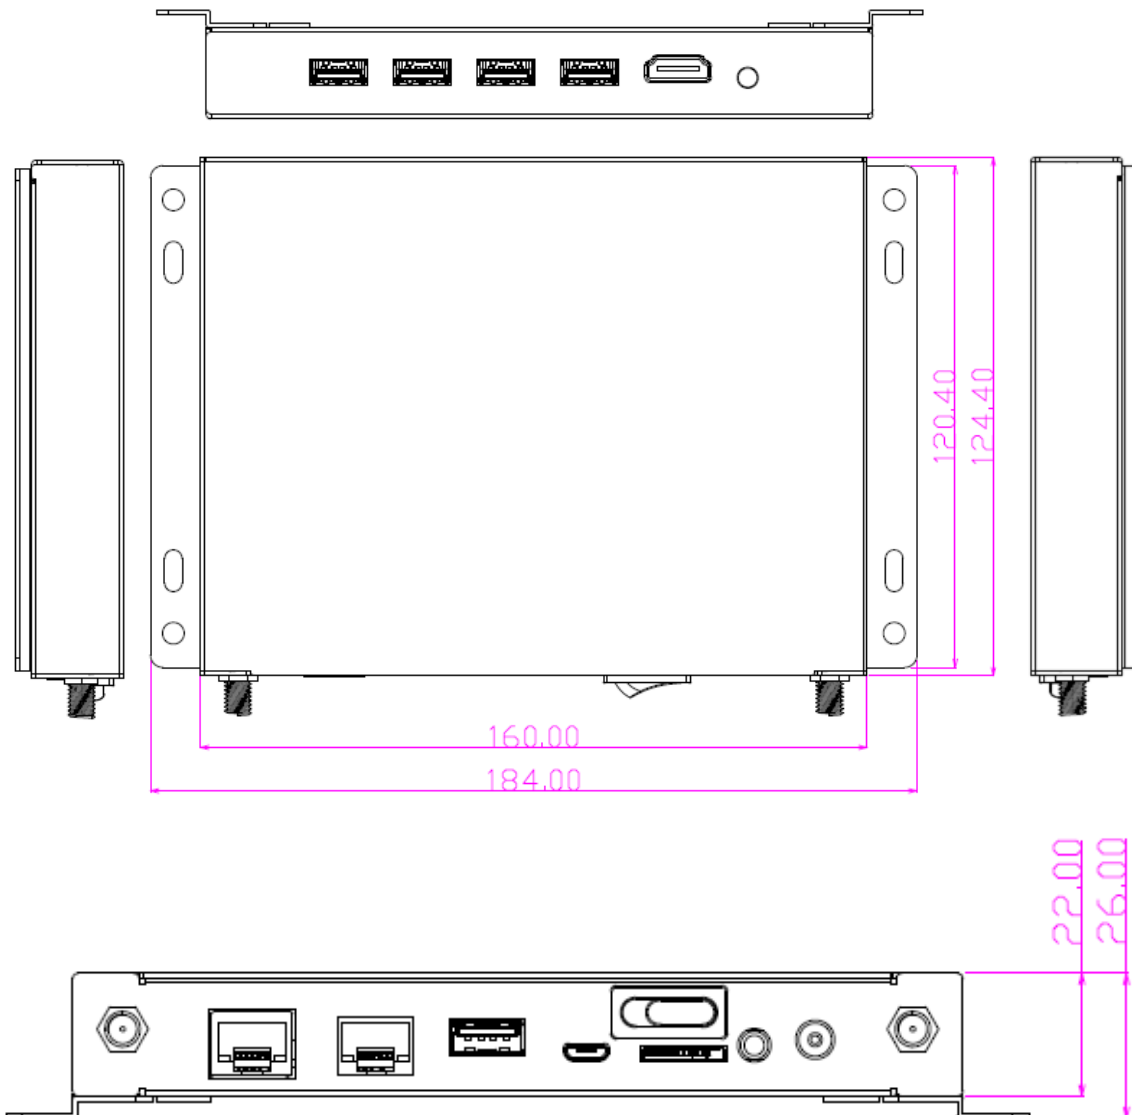

## Optional Accessories

Parts Number	Description
-----	HBJC922R3328-2N
G03-JBC922QIG01-F	JBC922 Quick Installation Guide
L01AS046-F	Adapter 12V/60W
-----	Power cord
J05-ANT-AN2400-F	Antenna2G4 -2dBi R-AN2400-5701RS