

HBJC311U93 Series NUC Fanless Embedded

Specification:


■ Dimension (W*D*H)	■ 116 * 110 * 49 mm		
■ Construction	■ Top cover & I/O plate –aluminum; Base- metal		
■ Product model	Non-WiFi	Mini PCIe b/g/n WiFi	Mini PCIe ac WiFi card
	HBJC311U93-2930-B (Default)	HBJC311U93W-2930-B	HBJC311U93Z-2930-B
■ MB model	■ JNU93-2930		
■ CPU	■ INTEL® Bay Trail-M N2930 SoC Processor		
■ BIOS	■ AMI UEFI		
■ Memory	■ 1 * SO-DIMM slot (Max. to 8GB)		
■ Storage Space	■ 1 * full size Mini PCIe slot for m-SATA Device		
■ Display Interface	■ 2 * HDMI (Max. Resolution: 1920×1200@60Hz)		
■ Network	■ 2 * RJ45 (Intel i211AT GbE)		
	■ WiFi (option)		
■ Audio	■ 1 * Line out		
■ Front I/O Port	■ 1 * USB 2.0		
	■ 1 * USB 3.0		
	■ 1 * COM		
■ Rear I/O Port	■ 2 * USB 2.0		
	■ 2 * HDMI (Max. Resolution: 1920×1200@60Hz)		
	■ 2 * RJ45 Giga LAN		
	■ 1 * Line-out (Support SPDIF)		
	■ 1 * DC-in jack		
■ Expansion Slot	■ 1 * half size Mini PCIe slot		
■ Power Source	■ 9~24V Wide range DC input		
	■ Adapter : AC_90~240V / DC_12V / 40W		
■ Certification	■ EMC : CE , FCC		
	■ Safety : RoHS , ErP		
■ Environment	■ Operating Temperature : 0°C~50°C with air flow (mSATA)		
	■ Storage Temperature : -10°C~70°C		
■ Mounting Bracket	■ Wall/VESA/DIN Rail combo mounting Kit		

■ Packing


- Net Weight : 0.9KG
- Gross Weight : 1.3KG
- Color Box Dimension : 158(W) x 167(D) x 123.6(H) mm

External I/O :


Rear

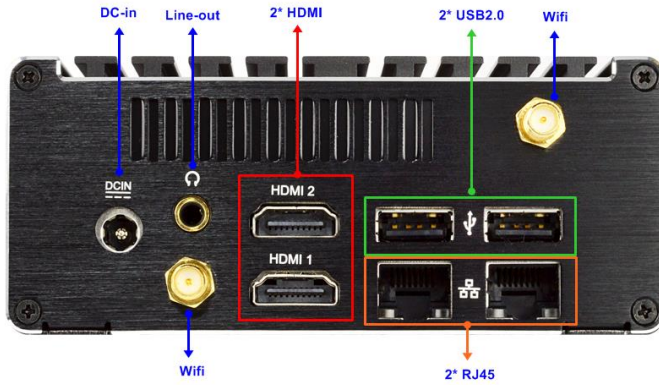

Front

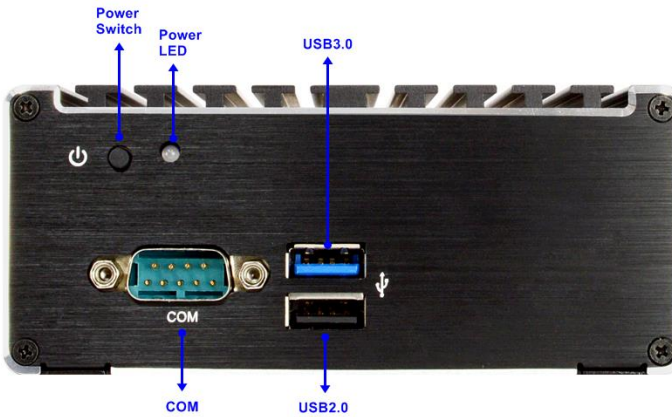

Part No. Rule :

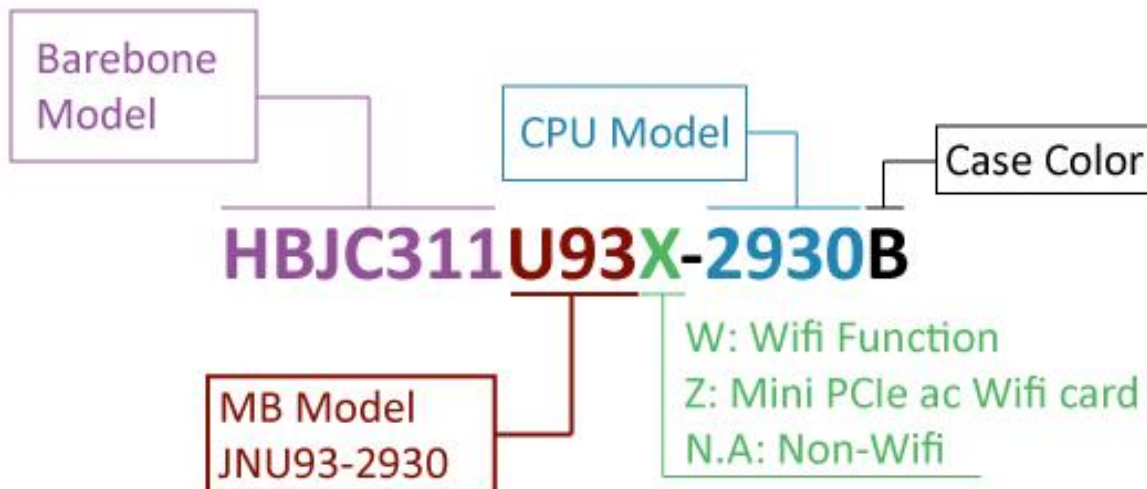

Standard Accessories :

Parts Number	Description
-----	HBJC311U93 Series
L01AS050-F	Adapter 12V_40W
Change according to shipping area	Power cord
HCS310MWM01B-2F	VESA Mount
LCSCHBJC3XX-F	Screw Pack
HCS3XXDINRAILPS-F	Din Rail Clip
HNSCOMWFAWCB161HF	Mini PCIe ac WiFi card (HBJC311U93Z-2930-B only)