



HBJC420U91 Series




NUC Slim Fanless Embedded System

Specification:


■ Dimension	■ 109.4(D) * 129(W) * 34(H) mm		
■ Construction	■ Lightweight aluminum alloy with extruded aluminum IO panel		
■ Product model	Non-Wifi	Mini PCIe b/g/n Wifi	Mini PCIe ac Wifi card
	HBJC420U91-2930-B (Default)	HBJC420U91W-2930-B	HBJC420U91Z-2930-B
■ M/B model	■ JNU91B-2930		
■ CPU	■ INTEL® Bay Trail-M N2930 SoC Processor(Max. 2.16GHz, 7.5W TDP)		
■ BIOS	■ AMI UEFI		
■ Memory	■ 1 * SO-DIMM slot (Max. to 8GB)		
■ Storage Space	■ 1 * full size Mini PCIe slot for mSATA Device		
■ Display Interface	■ 2 * HDMI (Max. Resolution: 1920×1200@60Hz)		
■ Network	■ 1 * Intel 82574L GbE		
	■ WiFi (option)		
■ Audio	■ 1 * Line-out		
■ Front I/O Port	■ 1 * USB 3.0		
	■ 1 * COM		
■ Rear I/O Port	■ 2 * USB 2.0,		
	■ 2 * HDMI		
	■ 1 * RJ45		
	■ 1 * Line-out		
	■ 1 * DC-in jack		
■ Expansion Slot	■ 1 * half size Mini PCIe slot		
■ Power Source	■ 9~24V DC input jack		
	■ Adapter : 12V/3.3A 40W		
■ Certification	■ EMC : CE , FCC		
	■ Safety : RoHS , ErP		
■ Environment	■ Operating Temperature : -10°C~50°C with air flow (mSATA)		
	■ Storage Temperature : -20°C~80°C		

■ Mounting Bracket	■ Wall/VESA/DIN Rail combo mounting Kit
■ Packing	■ Net Weight : 0.9KG ■ Gross Weight : 1.6KG ■ Color Box Dimension : 158(W) x 167(D) x 123.6(H) mm
■ Warranty	■ 2 Years limited warranty


Dimension :

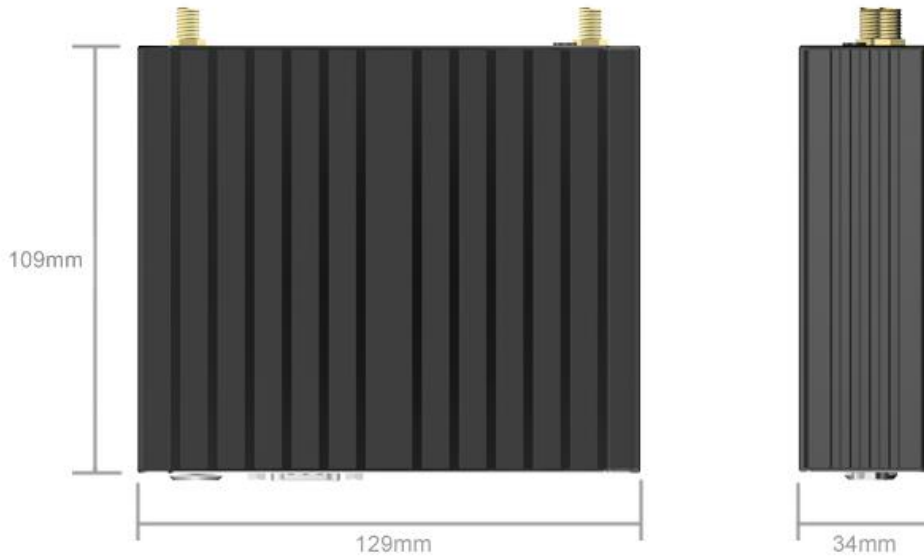


External I/O :

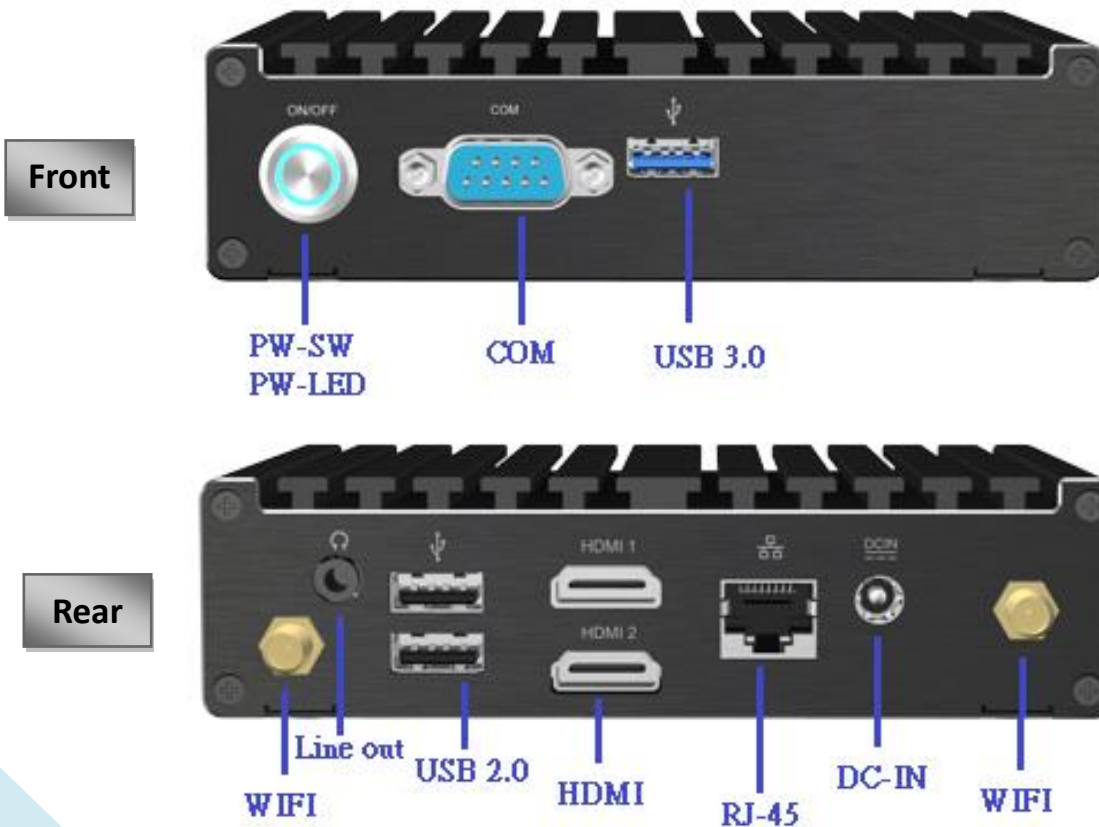

Internal schematic assembly :

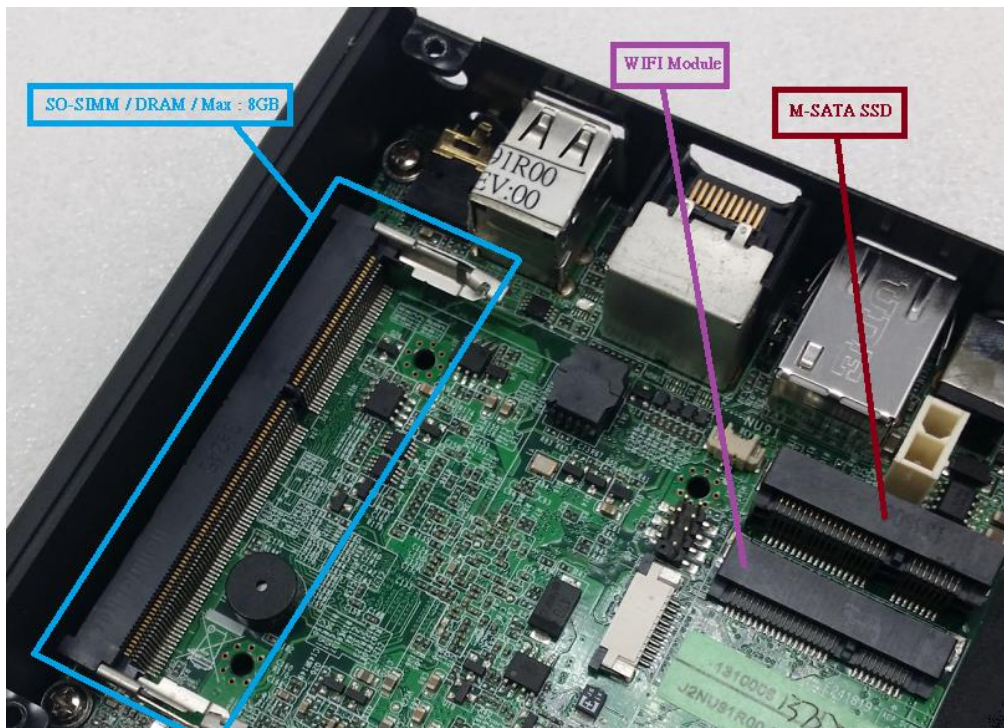

Part No. Rule :

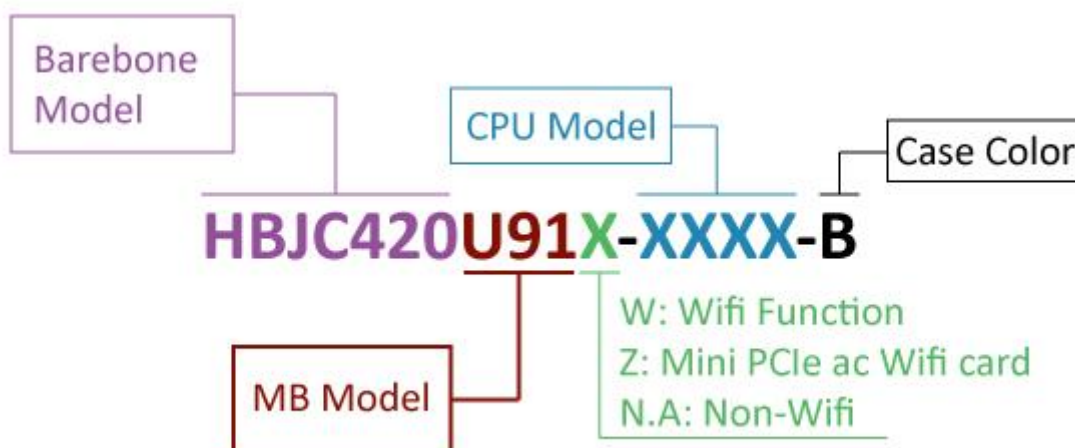

Accessory :

Parts Number	Description
-----	HBJC420U91 Series
L01AS050-F	Adapter 12V/3.3A 40W
Change according to shipping area	Power cord
HCS310MWM01B-F	WALL + VESA mount
LCSCBJC3XX-F	Screw pack
HCS3XXDINRAILPS-F	Din Rail Clip
HNSCOMWFAWCB161HF	Mini PCIe AC Wifi card (HBJC420U91Z-2930-B only)